



## Arrangements Round Large

by Michael Anastassiades , 2018

Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.5m





Mounting	Pendant
Environment	Indoor
Weight	1.3 Kg
Light sources available	1 x FLEX STRIP LED 54W 2751lm 2700K CRI90 [i]
Emergency	Without
Voltage	48V
Power	54W
Battery	No
Supply included	No

Cord Length	2500 mm
Materials	Aluminum

Colors	● F0408030 - Black
--------	--------------------

Certificate	  
-------------	--





## Arrangements Round Medium

by Michael Anastassiades , 2018


Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.


Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.5m



Mounting	Pendant
Environment	Indoor
Weight	0.8 Kg
Light sources available	1 x FLEX STRIP LED 35W 1770lm 2700K CRI90 [i]
Emergency	Without
Voltage	48V
Power	35W
Battery	No
Supply included	No
Cord Length	2500 mm
Materials	Aluminum
Colors	● F0407030 - Black
Certificate	  



## Arrangements Round Small

by Michael Anastassiades , 2018


Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.


Cable length 2.5m




Mounting	Pendant
Environment	Indoor
Weight	0.5 Kg
Light sources available	1 x FLEX STRIP LED 21W 1068lm 2700K CRI90 [i]
Emergency	Without
Voltage	48V
Power	21W
Battery	No
Supply included	No

Cord Length	2500 mm
Materials	Aluminum

Colors	● F0406030 - Black
--------	--------------------

Certificate	  
-------------	--





## Arrangements Drop Down

by Michael Anastassiades , 2018



Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.




Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.5m



Mounting	Pendant
Environment	Indoor
Weight	0.5 Kg
Light sources available	1 x FLEX STRIP LED 30W 1530lm 2700K CRI90 [i]
Emergency	Without
Voltage	48V
Power	30W
Battery	No
Supply included	No
Cord Length	2500 mm
Materials	Aluminum
Colors	● F0413030 - Black
Certificate	  



## Arrangements Drop Up

by Michael Anastassiades , 2018



Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.5m



Mounting	Pendant
Environment	Indoor
Weight	0.5 Kg
Light sources available	1 x FLEX STRIP LED 32W 1530lm 2700K CRI90 [i]
Emergency	Without
Voltage	48V
Power	32W
Battery	No
Supply included	No
Cord Length	2500 mm
Materials	Aluminum
Colors	● F0414030 - Black
Certificate	<div> <div>CE</div> <div>IP20</div> <div>III</div> </div>



## Arrangements Square Large

by Michael Anastassiades , 2018



Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.




Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.


Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.5m



Mounting	Pendant
Environment	Indoor
Weight	0.7 Kg
Light sources available	1 x FLEX STRIP LED 34W 1657lm 2700K CRI90 [i]
Emergency	Without
Voltage	48V
Power	34W
Battery	No
Supply included	No
Cord Length	2500 mm
Materials	Aluminum
Colors	● F0409030 - Black
Certificate	  



## Arrangements Square Small

by Michael Anastassiades , 2018


Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.5m




Mounting	Pendant
Environment	Indoor
Weight	0.5 Kg
Light sources available	1 x FLEX STRIP LED 20W 883lm 2700K CRI90 [i]
Emergency	Without
Voltage	48V
Power	20W
Battery	No
Supply included	No

Cord Length	2500 mm
Materials	Aluminum

Colors	● F0410030 - Black
--------	--------------------

Certificate	CE IP20 III
-------------	-------------





## Arrangements Broken Line

by Michael Anastassiades , 2018



Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.


Cable length 2.5m

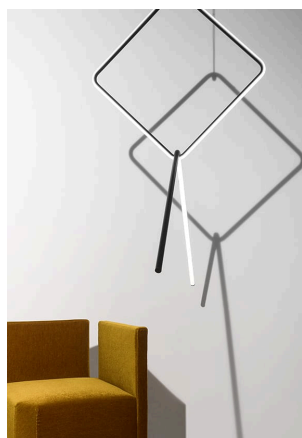


Mounting	Pendant
Environment	Indoor
Weight	0.65 Kg
Light sources available	1 x FLEX STRIP LED 24W 1200lm 2700K CRI90 [i]
Emergency	Without
Voltage	48V
Power	24W
Battery	No
Supply included	No


Cord Length	2500 mm
Materials	Aluminum

Colors ● F0405030 - Black

Certificate   







## Arrangements Line

by Michael Anastassiades , 2018


Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.5m




Mounting	Pendant
Environment	Indoor
Weight	0.7 Kg
Light sources available	1 x FLEX STRIP LED 29W 1480lm 2700K CRI90 [i]
Emergency	Without
Voltage	48V
Power	29W
Battery	No
Supply included	No

Cord Length	2500 mm
Materials	Aluminum

Colors  F0401030 - Black

Certificate CE IP 20 III




## Arrangements Line

by Michael Anastassiades , 2018




---

**F0415030**  
Big Rose-MAX190W



---

**F0416030**  
Small Rose-MAX70



---

**F0418030**  
Recessed Rose-MAX190W